


► IBAKmarine NHS350

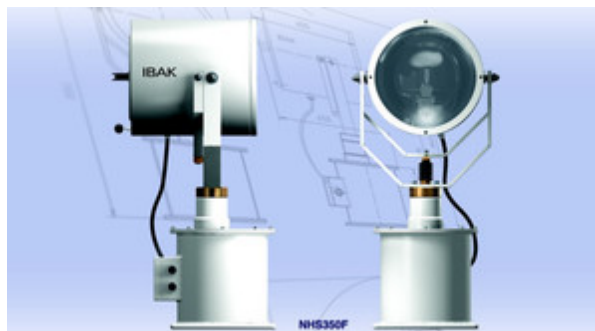

IBAKmarine NHS350 is a marine searchlight

System Technical Data

Material: Seawater resistant aluminium with structure coating in white
Type of enclosure: IP56
Front glass: Hard glass unaffected by temperature changes
Lamps/
voltage: Halogen lamp 650W/230V, GX9.5
Halogen lamp 1000W/230V, GX9.5
Halogen lamp 250W/24V, E40
Halogen lamp 500W/24V, E40
Incandescent lamp 500W/24V, E40
Incandescent lamp 500W/220V, E40

Type description:

Type A with deck footing
Type B with pedestal
Type C with cabin control, deck mounting
Type D with cabin control, pedestal mounting
Type F with electric remote-controlled pan and tilt gear SN2.1 and control unit STG1 for flush mounting
optionally: additional control unit(s) available

Photometric data:

(Data measured on optical measuring equipment for practical use.)

Wattage/ voltage	One-half peak divergence	Range at 1 Lux	Max. luminous intensity
650W/ 230V	4.2°	678 m	4.6 x 105cd
1000W/ 230V	6.0°	693 m	4.8 x 105cd
1000W/ 120V	6.4°	721 m	5.2 x 105cd
250W/ 24V,E40	2.8°	742 m	5.5 x 105cd
500W/ 24V,E40	5.0°	781 m	6.1 x 105cd
500W/ 24V,E40, t.m.	3.6°	1000 m	10.4 x 105cd
500W/ 230V,E40, t.m.	4.0°	625 m	3.9 x 105cd

Download brochure

[Download IBAK NHS350 brochure](#)